



Measurement and Prediction of Workplace Exposure to Solar Ultraviolet Radiation in Makurdi, Benue State, Nigeria

Samson Dauda Yusuf ^{a*}, Christopher Chiahemba Akoso ^a,
Timothy Chidozie Akpa ^b and Lucas Williams Lumbi ^a

^a Department of Physics, Faculty of Natural and Applied Sciences, Nasarawa State University, Keffi, PMB 1022, Nigeria.

^b Department of Radiological Safety, Nigerian Nuclear Regulatory Authority, Abuja, Nigeria.

Authors' contributions

This work was carried out in collaboration among all authors. All authors contributed to the study conception and design. Material preparation, data collection and analysis were performed by authors SDY, CCA, TCA and LWL. The first draft of the manuscript was written by author CCA. Reviewed and re-drafted by author SDY. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/AJARR/2022/v16i11435

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/91978>

Original Research Article

Received 25 July 2022
Accepted 29 September 2022
Published 06 October 2022

ABSTRACT

Aims: To measure and predict the workplace exposure to solar ultraviolet radiation in Makurdi, Benue State, Nigeria.

Study Design: Experimental design through area monitoring method and Newton divided interpolation difference method.

Place and Duration of Study: Makurdi Metropolis, Benue State and Department of Physics, Nasarawa State University Keffi, Nigeria, between April and June 2021.

Methodology: Digital broad band meter was used to measure UV irradiance at SRS junction (Traffic light) and Kanshio (construction site) at hourly intervals from 10:00am- 4:00pm. The exposure results were used to derive a predicting function using the Newton Divided Difference Interpolation method and were plotted into MATLAB to generate the predicted results. Also, the UV index was also calculated.

Results: The mean irradiant values were 179.100J/m² and 173.53J/m² with erythema effective irradiances 227.300J/m² and 205.000J/m² which is 1.14 and 1.03 minimum erythema doses

*Corresponding author: Email: samsonyusufu@yahoo.com;

(MED)/hr, while the predicted mean values were $179.100 \pm 0.025 \text{ J/m}^2$ and $172.800 \pm 0.004 \text{ J/m}^2$ for the traffic wardens and construction site workers respectively. The mean values were higher than the ICNIRP recommended safety limit of 30.000 J/m^2 for occupational exposure and MED for skin type I was exceeded by a factor of 1. The calculated UV index was 8 for construction site and 9 for traffic light wardens.

Conclusion: High level of accuracy of the prediction model implies that it can be used for prediction of SUV radiation. However, high mean irradiant values with high UV index indicates high risk of harm from unprotected sun exposure. Therefore, use of sun protective clothing is recommended and reduce time in the sun especially between 1:00pm and 2:00pm to prevent over exposure that will lead to serious harmful effects.

Keywords: Irradiance; UV radiation; occupation exposure; minimum erythema doses; prediction function; Newton divided interpolation.

1. INTRODUCTION

Solar Ultraviolet Radiation (SUVR) is part of the non-ionizing electromagnetic radiation spectrum emitted by the sun that has influence on major processes in the biosphere [1,2]. Ultraviolet radiation (UV) is divided into three bands of wavelengths, which are UVA (320-400nm), UVB (290-320nm) and UVC (200-290nm) [3]. A major portion of the UVA and about 10% of UVB radiation reaches the earth's surface from the sun while UVC is totally absorbed by the atmospheric ozone, water vapour and gasses [4,2,5].

Solar UV radiation has beneficial effects to human health and Agriculture. However, over exposure to UV radiation plays a major role in the development of photo-conjunctivitis, skin cancers, pterygium, cortical cataract, photo-ageing, carcinoma of cornea, immune depression in humans, plant susceptibility to diseases, and great threat to crops and ecological system [6,7,2]. Despite the numerous effects of UVR, its measurement and prediction has received negligible attention and the observational data available are scanty and few [8,2].

According to Fleischmann [9], quantification of the amount of radiation a living being receives is paramount in examining the effects of solar UV radiation on living beings as well its predictability, hence, the motivation for this research. This study seeks to predict the Solar UV radiation; the amount of SUVR an outdoor worker receives at given intervals, so as to complement the National and international UVR protection programs such as WHO-INTERSUN on global UV project and in so doing, contribute to the baseline data that

would enable a successful UV Index forecast especially in the study location.

2. MATERIALS AND METHODS

2.1 Materials

The materials that were utilized for the purpose of this research includes TM-206 digital UV broadband meter, rubber human manikin, UV/VIS spectrophotometer, polymer polysulphone dosimeters, and Twelve-channel GPS.

2.2 Methods

2.2.1 Study area

This study was carried out in Makurdi town which is sited between latitude $7^{\circ}38'N$ - $7^{\circ}50'N$, and longitude $8^{\circ}24'E$ and $8^{\circ}38'E$. It is situated in the Benue valley in the North Central region of Nigeria. River Benue, which is the second largest river in the country, cuts across Makurdi town and divides it into the north and south banks. The population of Makurdi is around 500,797 [10]. The main occupation of the inhabitants of Makurdi town is largely of people who engage in civil service duties, commercial activities and agrarian peasantry. Makurdi town doubles as the headquarters of Makurdi Local Government Area as well as the capital of Benue State.

2.2.2 Sample points/ locations

The simple random sampling technique was used to select two locations where the area monitoring survey was carried out and the GPS readings for the study locations where data was taken for this study is presented in Table 1.

Table 1. GPS locations at various study sites

S/N	Location	Location Code	Longitude	Latitude	Angle of Elevation
1	Kanshio (Construction Site)	CW	07040.8709'	008032.2369'	118m
2	SRS Junction (Traffic)	TW	07045.6870'	00804729'	138m

2.2.3 Measurement of hourly UV irradiance using UV broadband meter

The in situ measurements was carried out each at the construction site and traffic light, where the TM-206 digital broadband meter was used for measuring the UV exposure. Measurements were carried out at hourly intervals from 10:00am to 4:00am on 14 – 19 March, 2021, that is six consecutive days (3 days at the construction site and 3 days at the traffic light). The UV meter was exposed three times after every hour to measure the hourly UV exposure on a horizontal plane and the mean value was recorded for each hour. Daily data obtained for the three days experiment at each of the sites was recorded as R₁, R₂ and R₃. According to Sombo et al. [5], the UV meter detects both UVA and UVB and calculates the UV irradiance (Solar Power Density in W/m²) by averaging the reading of various wavelengths according to Erythema Action Spectrum.

2.2.4 Determination of effective dose using Newton divided method

In order to have idea about the UV exposure of outdoor workers in between the hours which data was collected, predicting formulas were obtained using Newton Divided Interpolation (NDDI). Given a function y = f(x), which may be a set of data points between y_n and x_n, the process of finding the value of y corresponding to any value of x = x_i between x₀ and x_n is referred to as interpolation. Thus, Interpolation is the technique of estimating the value of a function for any intermediate value of the independent variable [11]. Polynomial functions are preferred to other functions for interpolating because many operations such as determination of roots, differentiation and integration can be performed more easily [12].

To construct Newton divided difference interpolating polynomials, let the nodes or arguments be defined by x_k = x₀, x₁, x₂, ..., x_n and the unknown function f(x_k). The coefficients of Newton divided difference polynomial as described in Burden and Fairs [13] are obtained from Table 2.

Once the coefficients are obtained for Table 2, for each k = 0, 1, 2 ... n, Newton Divided Difference Polynomial is given by;

$$P_n(x) = f[x_0] + \sum_{k=1}^n f[x_0, x_1, \dots, x_k](x - x_0) \dots (x - x_{k-1}) \tag{1}$$

Equation (1) was applied to get the required predicting function at the various study sites. The generated equation is thereafter plotted into Matlab to obtain accurate values.

2.2.5 Method of comparing data point with prediction function

Data points are measured irradiance values which were used to compare with the generated values from the prediction function. The prediction function are values obtained by the using Newton Divided Interpolation Difference plotted in Matlab.

2.2.6 UV index calculation method

The UV Index for the two sites were calculated following the relationship given by Downs et al. [14] as follows:

$$I_{UV} = \frac{E_{ery}}{25} \tag{2}$$

Where E_{ery} is the erythema effective UV Irradiance.

The UV index (UVI) is an international standard measurement of the intensity of the UV radiation from the sun at the Earth’s surface [15]. It is a scale that is primarily used in daily forecast for the general public. It has been designed to help people to effectively protect them from UVR. This was first developed in 1992 by Environment Canada to broadcast forecasts of predicted daily UV levels for the next day [16]. However, the World Health Organization (WHO) in 2002 replaced the inconsistent regional methods by using worldwide standardized UV index as shown in Table 3.

Nowadays several international organizations and standards agree on the UV index (International Commission on Nonionizing Radiation Protection, World Health Organization and World Meteorological Organization or European Commission) and it is proposed to be used in public information [17]. The UV Index is not only a base for sun protection recommendations, but also used in risk assessment and health care.

Table 2. Creation of mathematical model to determine dose [13]

X	f(x)	First Divided Difference	Second Divided Difference	Third Divided Difference
x_0	$f[x_0]$			
		$f[x_0, x_1] = \frac{f[x_1] - f[x_0]}{x_1 - x_0}$		
x_1	$f[x_1]$		$f[x_0, x_1, x_2] = \frac{f[x_1, x_2] - f[x_0, x_1]}{x_2 - x_0}$	
		$f[x_1, x_2] = \frac{f[x_2] - f[x_1]}{x_2 - x_1}$		$f[x_0, x_1, x_2, x_3] = \frac{f[x_1, x_2, x_3] - f[x_0, x_1, x_2]}{x_3 - x_0}$
x_2	$f[x_2]$		$f[x_1, x_2, x_3] = \frac{f[x_2, x_3] - f[x_1, x_2]}{x_3 - x_1}$	
		$f[x_2, x_3] = \frac{f[x_3] - f[x_2]}{x_3 - x_2}$		$f[x_1, x_2, x_3, x_4] = \frac{f[x_2, x_3, x_4] - f[x_1, x_2, x_3]}{x_4 - x_1}$
x_3	$f[x_3]$		$f[x_2, x_3, x_4] = \frac{f[x_3, x_4] - f[x_2, x_3]}{x_4 - x_2}$	
		$f[x_3, x_4] = \frac{f[x_4] - f[x_3]}{x_4 - x_3}$		$f[x_2, x_3, x_4, x_5] = \frac{f[x_3, x_4, x_5] - f[x_2, x_3, x_4]}{x_5 - x_2}$
x_4	$f[x_4]$		$f[x_3, x_4, x_5] = \frac{f[x_4, x_5] - f[x_3, x_4]}{x_5 - x_3}$	
		$f[x_4, x_5] = \frac{f[x_5] - f[x_4]}{x_5 - x_4}$		
x_5	$f[x_5]$			

Table 3. UV radiation exposure categories, description and recommendation for protection [15]

UV Index	Description	Media Graphic Color	Recommendation for Protection
0 – 2	Low danger to the average person	Green	Wear sunglasses use sunscreen if there is snow on the ground, which reflects UV radiation, or if you have particularly fair skin
3 – 5	Moderate risk of harm from unprotected sun exposure	Yellow	Wear sunglasses and use sunscreen, cover the body with clothing and a hat, and seek shade around midday when the sun is most intense
6 – 7	High risk of harm from unprotected sun exposure	Orange	Wear sunglasses and use sunscreen having SPF 15 or higher, cover the body with sun protective clothing and a wide-brim hat, and reduce time in the sun from two hours before to three hours after solar noon (roughly 11:00 AM to 4:00PM during summer in zones that observe daylight saving time).
8 – 10	Very high risk of harm form unprotected sun exposure	Reddish – purple	Same precautions as above, but take extra care – unprotected skin can burn quickly
11+	Extreme risk of harm from unprotected sun exposure	Violet	Take all precautions, including: wear sunglasses and use sunscreen, cover the body with a long – sleeve shirt and pants, wear a broad hat, and avoid the sun from two hours before to three hours after solar noon

3. RESULTS

3.1 Hourly UV Exposure

The result of the mean hourly UV exposure of the various occupations at their respective sites that were measured from 10:00am to 4:00pm on 14 – 19 March, 2021 using the UV broadband meter are presented in Table 4.

Table 4 constitutes the results for traffic light workers and construction site workers at SRS junction and Kanshio. It can be seen that the solar irradiance indicates the highest irradiance of 227.30W/m² at 1pm for traffic light workers and 205.30W/m² at 2pm for construction site workers respectively. The lowest irradiance was

recorded at 10am with 115.50W/m², 127.70W/m² for traffic light workers and construction site workers respectively. By comparison, it is worthy of note that irradiance highest values were obtained within the intervals of 12 to 2pm and this is as a result of high solar intensity witness at these hours within the metropolis.

3.2 Prediction Model using Newton Divided Difference

The result of the UV irradiance from Table 4 was used to generate the prediction functions for the two sites using the Newton divided difference template in Table 2, the results are presented as shown in Table 5.

Table 4. Hourly UV exposure of various occupations

Occupation	Time	Exposure (W/m ²)			
		R1	R2	R3	Mean
TW	10am	113.90	115.80	116.90	115.50
	11am	189.10	181.00	161.30	177.30
	12noon	190.30	189.20	189.30	189.60
	1pm	227.00	228.00	227.00	227.30
	2pm	214.00	213.00	215.00	214.00
	3pm	177.90	175.80	172.50	175.40
	4pm	159.60	153.20	151.10	154.60
	CW	10am	123.70	130.30	129.00
11am		175.00	177.70	180.70	177.80
12noon		180.70	188.30	180.70	183.20
1pm		198.00	199.30	190.70	196.00
2pm		207.00	200.00	209.00	205.30
3pm		178.40	177.30	180.00	178.60
4pm		137.70	146.00	140.50	141.40

Key: CW = construction workers, TW = traffic workers, R = reading

Table 5. Generated Newton divided difference

n	x _n	f[x _n]	f[x _{n-1} , x _n]	f[x _{n-2} , x _{n-1} , x _n]	f[x _{n-3} , x _{n-2} , x _{n-1} , x _n]	f[x _{n-4} ... x _n]	f[x _{n-5} ... x _n]	f[x _{n-6} ... x _n]
0	10	115.50						
1	11	177.30	61.80					
2	12	189.60	12.30	-24.75	12.48			
3	13	227.30	37.70	12.70	-12.73	-6.30	2.11	
4	14	214.00	-13.30	-25.50	4.28	4.25	-0.71	-0.47
5	15	175.40	-38.60	-12.65	7.18	0.72		
6	16	154.60	-20.80	8.90				

In order to obtain a predicting equation, we apply the results from Table 5 into the equation (1) as follows:

$$P_n(x) = f[x_0] + \sum_{k=1}^n f[x_0, x_1, \dots, x_k](x - x_0) \dots (x - x_{k-1})$$

We obtain:

$$P_1 = 115.50 + 61.80(x - 10) - 24.75(x - 10)(x - 11) + 12.48(x - 10)(x - 11)(x - 12) - 6.30(x - 10)(x - 11)(x - 12)(x - 13) + 2.11(x - 10)(x - 11)(x - 12)(x - 13)(x - 14) - 0.46(x - 10)(x - 11)(x - 12)(x - 13)(x - 14)(x - 15)$$

Applying this to maple and factorizing gives:

$$P_1 = -2.10 * 10^6 x^2 + 21477.55 x^3 - 1229.78 x^4 + 37.34 x^5 - 0.47 x^6 - 2.33 * 10^6 + 1.09 * 10^6 x$$

The above equation is reconstructed as follows:

$$P_1 = 21470.37 * x.^3 - 1229.48 * x.^4 + 37.33 * x.^5 - .47 * x.^6 - 2.33 * 10^6 - 2.10 * 10^5 * x.^2 + 1.09 * 10^6 * x$$

Thus, P_1 is the desired predicting equation which was used in Matlab to generate the predicted function for the Traffic Workers.

Similarly, the same procedure was followed to obtain the predicting equations P_2 and subsequently plotted in Matlab to generate predicted function for Construction Workers.

Thus, the predicting equation P_2 for the construction workers is giving as;

$$P_2 = 0.65 * x^6 - 50.34 * x^5 + 1629.14 * x^4 - 27990.56 * x^3 + 2.69 * 10^5 * x^2 - 1.37 * 10^6 * x + 2.91 * 10^6$$

The predicted values for Traffic and Construction Workers are as presented in Table 6.

3.3 Comparison of Data Points with Predicted Functions

The Table 6 presents the result of data points which is the average of the measured irradiance and the prediction functions which were obtained

from P_1 and P_2 by varying x which represents time interval between which data were measured i.e. 10:00 hours to 16:00 hours. From the results, errors were calculated for each measured data with prediction function as presented in Table 6.

From Table 6, the results of traffic light (SRS Junction) indicates that at 10:00 hours, 115.514W/m² was recorded as against the data point of 115.500W/m² with error 0.014W/m². Similarly, at 11:00 hours, 177.317W/m² value was obtained against the data point of 177.300W/m² which indicate a minimal error of 0.017W/m² from the prediction function. Furthermore, at 12:00 hours to 16:00 hours, the following values were obtained from the prediction; 189.620W/m², 227.324W/m², 214.029W/m², 175.434W/m² and 154.640W/m² against the data point values of 189.600W/m², 227.300W/m², 214.000W/m², 175.400W/m² and 154.600W/m² respectively which implies the corresponding errors of 0.020W/m², 0.024W/m², 0.029W/m², 0.034W/m² and 0.040W/m² respectively.

Table 6. Predicted irradiance for traffic light and construction sites workers

Occupation	Time (Hours)	Data Points (W/m ²)	Prediction Function (W/m ²)	Error
TW4	10.000	115.500	115.514	0.014
	11.000	177.300	177.317	0.017
	12.000	189.600	189.620	0.020
	13.000	227.300	227.324	0.024
	14.000	214.000	214.029	0.029
	15.000	175.400	175.434	0.034
	16.000	154.600	154.640	0.040
CW4	10.000	127.700	127.699	0.002
	11.000	177.800	177.798	0.002
	12.000	188.200	183.197	0.003
	13.000	196.000	195.997	0.003
	14.000	205.000	204.996	0.004
	15.000	178.600	178.595	0.005
	16.000	141.400	141.394	0.007

Key: TW4 = traffic workers, CW4 = construction workers

Furthermore, from the construction site (Kanshio), the result reviewed that at 10:00 hours, 127.699W/m^2 with a corresponding error of 0.002W/m^2 against data point value of 127.700W/m^2 . Likewise, 177.798W/m^2 at 11:00 hours with an error of 0.002W/m^2 against the data point of 177.800W/m^2 . Also, at 12:00 hours, 183.198W/m^2 was recorded with an error of 0.003W/m^2 against 183.200W/m^2 data point value. The results for 13:00 hours to 16:00 hours were; 195.997W/m^2 , 204.996W/m^2 ,

178.595W/m^2 and 141.394W/m^2 respectively with the corresponding errors of 0.003W/m^2 , 0.004W/m^2 , 0.005W/m^2 and 0.007W/m^2 respectively against the corresponding data point values of 196.000W/m^2 , 205.000W/m^2 , 178.600W/m^2 and 141.400W/m^2 respectively.

Graph of the predicted irradiance values against the data points for traffic light workers and construction site workers in dry season are presented in Fig. 1 and 2.

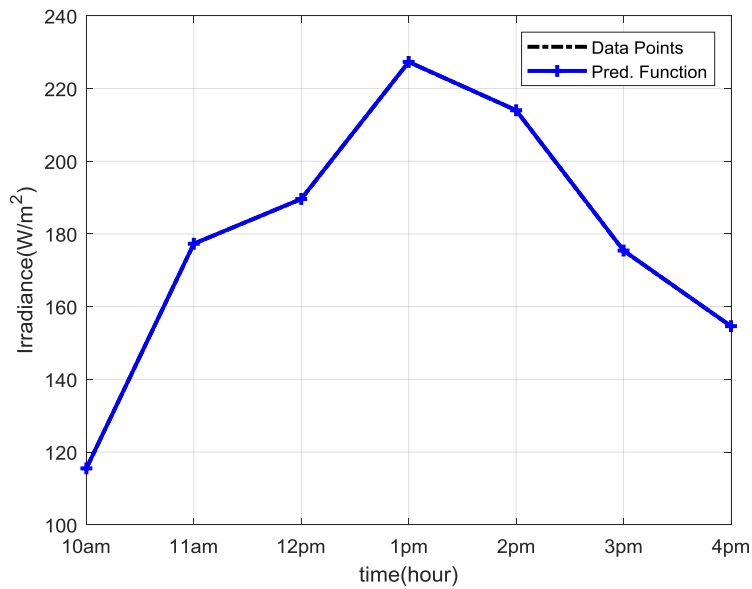


Fig. 1. Graph of predicted values with data points for traffic light workers (Dry Season)

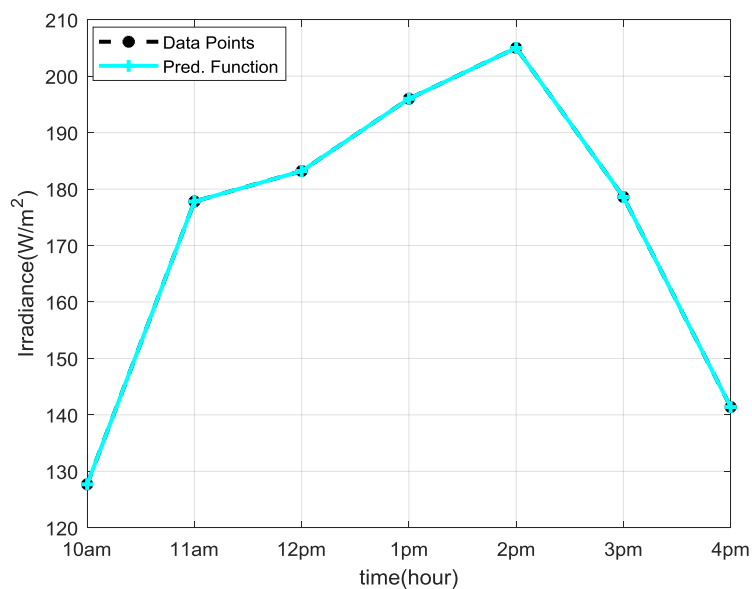


Fig. 2. Graph of predicted values with data points for construction site workers (Dry Season)

3.4 Calculated UV Index

The UVI for the study locations at the peak hours of this research duration were calculated from the tabulated values of UV Irradiance in Table 4, using equation (2) as follows:

For the traffic light workers, we have the UV index as:

$$I_{uv} = \frac{E_{ery}}{25} = \frac{227.3}{25} = 9$$

For the construction workers, we have the UV index as:

$$I_{uv} = \frac{E_{ery}}{25} = \frac{205}{25} = 8$$

Public-health organizations recommend that people protect themselves when the UV index is 3 or higher [15]. Using Table 3, the description of the UV index and recommendation protection for traffic workers and construction workers is presented in Table 7.

From Table 7 the calculated UV Index for TW and CW are 9 and 8, represented by the media graphic colours purple and reddish respectively. This indicates high risk of harm from unprotected sun exposure in both sites. It is therefore recommended that people working outdoor in these two sites should wear sunglasses and use sunscreen having SPF 15 or higher, cover the body with sun protective clothing and a wide-brim hat, and reduce time in the sun within solar peak hours during dry season that observe daylight saving time. Extra care should also be taken especially for the traffic light workers as skin can burn easily.

4. DISCUSSION

The measurement and prediction of workplace exposure to solar ultraviolet radiation in Makurdi, Benue State, Nigeria using the Newton divided interpolation method has revealed vital information. Findings from this study have shown, that the prediction model used in this study showed high level of accuracy as the values of the prediction function were almost the same as the data points captured at the site with negligible estimated errors. This was evident from the overlapping graphs for instance, at the traffic light, 115.500W/m^2 (115.500J/m^2) was recorded at about 10:00 hours, the modeled result revealed 115.514W/m^2 (115.513J/m^2) which produced a marginal error of 0.014.

Similarly, the same marginal errors were recorded from the hours of 10:00 to 4:00 throughout the study due to high level of accuracy of the prediction model. The peak hour of solar intensity at the construction site was at 2:00 hours. The irradiance was recorded to be 205.000W/m^2 (205.000J/m^2) while the prediction was 204.996W/m^2 (204.996J/m^2) with a negligible error of 0.004. This clearly shows that the prediction can be sufficiently used at any solar hour. This finding is quite different with that of Adeniji et al. [18] who estimated global solar radiation, sunshine hour distribution and clearness index using Gunn Bellani Radiometer and Angstrom-type correlation in Nugu, Nigeria.

Findings from this study have also shown that the mean irradiant value at the traffic light was 179.100W/m^2 (179.100J/m^2) with erythema effective irradiance 227.300W/m^2 (227.300J/m^2) occurring at 13:00 hours which is 1.140 minimum erythema dose (MED)/hr, while the predicted mean value was $179.100 \pm 0.025\text{W/m}^2$ ($179.100 \pm 0.025\text{J/m}^2$). Also, the mean irradiant value at the construction site was 173.530W/m^2 (173.530J/m^2) with erythema effective irradiance 205.000W/m^2 (205.000J/m^2) occurring at 14:00 hours which is 1.030 MED/hr, while the predicted mean value was $172.800 \pm 0.004\text{W/m}^2$ ($172.800 \pm 0.004\text{J/m}^2$). These values are way higher than the ICNIRP recommended safety limit of 30.000J/m^2 for occupational exposure as stated in Vecchia et al. [19]. UV index was 8 for construction site and 9 for traffic light, indicating very high risk of harm from unprotected sun exposure. This implies that the occupational workers carrying out outdoor activities especially traffic wardens and construction workers around Makurdi Metropolis are been over exposed to UVR which with time, they may experience photo-conjunctivitis, skin cancer, cortical cataract, photo-ageing, carcinoma of cornea, and immune depression among others. This finding is in line with that of Parisi et al. [20] who determine solar erythema UVR exposures to the skin through common summer garments during outdoor activities and obtained 1.7 MED/hr using polysulphone dosimeters in Australia. Also, the findings is in line with the findings of Kimlin et al. [21] who worked on anatomical distribution of solar UVR exposures among cyclists and obtained 0.940 MED for the ankle, 1.280 MED for back of the hand, 1.140 MED for side of the head, and 1.800 MED for the head top using polymer polysulphone dosimeters in Queensland, Australia. The findings are also well compared with that of Igbawua et al. [6] who

Table 7. Calculated UV Index for TW and CW alongside recommendation protection

Location	Calculated UV Index	Description	Media Graphics Colour	Recommendation for Protection
TW	9	Very high risk of harm from unprotected sun exposure	Purple	Wear sunglasses and use sunscreen having SPF 15 or higher, cover the body with sun protective clothing and a wide-brim hat, and reduce time in the sun from two hours before to three hours after solar noon (roughly 11:00 am to 4 PM during dry season that observe daylight saving time. Extra care should be taken as skin can burn easily.
CW	8	Very high risk of harm from unprotected sun exposure	Reddish	Wear sunglasses and use sunscreen having SPF 15 or higher, cover the body with sun protective clothing and a wide-brim hat, and reduce time in the sun from two hours before to three hours after solar noon (roughly 11:00 am to 4 PM during dry season that observe daylight saving time.

Key: TW = Traffic light workers and CW = construction site workers

determined the average solar UV radiation dosimetry and obtained a mean value of $432.000 \pm 47.000 \text{ J/m}^2$ using UVR- meter and Polymer Polysulphone dosimeters at Gboko, Central Market Benue State. The findings in this study are not in line with that of Weber et al. [22] who worked on Solar UVR exposure of outdoor workers and obtained an erythema radiant exposure of 2700.000 J/m^2 which is 13.500 MED for skin type 1 using UVR-sensitive polysulphone (PS) film badges and electronic UV dosimeters in Austria. Also, this finding is not in line with that of Wolska [7] who worked on occupational exposure to solar ultraviolet radiation of polish outdoor worker and the result exceeded 10 standard erythema doses using risk estimation method and criterion. The finding is also not in line with those obtained by Cockell et al. [23] who determined a (70S; 80W) field scientist's erythema UVR exposure in the Arctic using biological UVR dosimeters that uses B. Subtilisbio film and 5.80 standard erythema dose (SED) compared to 14.40 SED for a horizontal surface.

5. CONCLUSION

The use of Newton Divided Interpolation Method have shown high level of accuracy for the predicted values. This is evidence, as there is no significant difference between the measured irradiance values and the predicted values for both construction site and traffic light areas. However, the results of this research have shown that the mean outdoor UVR levels in Makurdi metropolis are above the ICNIRP recommended safety limit for occupational exposure of 30.000 J/m^2 as stated in Vecchia et al. [19]. The erythema radiant exposures were measured and consequently the MED for skin type I (MED = 200.000 J/m^2) was exceeded by a factor of 1. Exposure to high outdoor UVR can lead to Erythema effects which is basically seen as the redness of the skin due to sunburn which is premised by over exposure to solar radiation. Therefore, traffic warden and construction workers around Makurdi Metropolis should avoid outdoor activities at high sunshine hours (13:00 hours to 14:00 hours) and wear protective clothing so as to avoid over exposure to UVR that could cause severe harmful effects. We recommend that future study should compared their findings with the value determined by weather forecast in the same city at the same time and day, so as to obtain more information that will yield good policy decision in the area.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Kumar KK, Viswanathan B. Weather variability and agriculture: Implications for long and short-term migration in India. Centre for Development Economics Department of Economics, Delhi School of Economics. 2012;1-27.
2. Sombo T, Ellah MS, Awuhe AA, Geoffrey FT, Shivil TJ. Assessment of Solar Ultra-Violet Radiation Exposure at Major Commercial Centers in Makurdi Metropolis, North Central-Nigeria. IOSR Journal of Applied Physics (IOSR-JAP). 2018;10(3):12-14.
3. IARC Working Group on the Evaluation of Carcinogenic Risks to Humans. Radiation. Lyon (FR): International Agency for Research on Cancer; 2012. (IARC Monographs on the Evaluation of Carcinogenic Risks to Humans, No. 100D.) Solar and Ultraviolet Radiation; 2012. Available:<https://www.ncbi.nlm.nih.gov/books/NBK304366/>. Access 06 May 2020.
4. Barbero FJ, Lopez G, Batlles FJ. Determination of daily solar ultraviolet radiation using statistical models and artificial neural networks. Ann. Geophy. 2006;24(8):2105-2114.
5. Sombo T, Shivil TJ, Igbawua T. Measurement and assessment of occupational exposure to solar ultraviolet radiation in Makurdi Metropolis, Benue State, Central Nigeria. Radiation Science and Technology. 2021;7(2):32-40.
6. Igbawua T, Ikyo B, Agba E. Average Solar UV Radiation Dosimetry in Central Nigeria. International Journal of Environmental Monitoring and Analysis. 2013;1(6):323-327.
7. Wolska A. Occupational exposure to solar ultraviolet radiation of polish outdoor workers: risk estimation method and criterion. International Journal of Occupational Safety and Ergonomic. 2013;19(1):107-116.
8. Foyo-Moreno I, Vida J, Alados-Arboledas L. Ground based ultraviolet (290–385 nm) and broadband solar radiation measurements in south-eastern Spain. International Journal of Climatology: A

- Journal of the Royal Meteorological Society. 1998;18(12):1389-1400.
9. Fleischmann EM. The measurement and penetration of ultraviolet radiation into tropical marine water. *Limnology and Oceanography*. 1989;34(8):1623-1629.
 10. Inter Press Service. Nigeria: Census Stirs Up Emotions in States, *Africa News*. 2007;02.12.
 11. Grewal BS. *Numerical Methods in Engineering and Science with Programs in C and C++*. 9th ed. New Delhi: Khanna Publishers; 2010.
 12. Jain MK, Iyengar SRK, Jain RK. *Numerical Methods for Scientific Engineering and Computations*. 5th ed. New Delhi: New Age International Publishers; 2007.
 13. Burden RL, Faires JD. *Numerical Analysis*. 9th ed. USA: Brooks/Cole; 2011.
 14. Downs N, Parisi AV, Galligan L, Turner J, Amar A, King R, Ultra F, Butler H. Solar radiation and the UV index: An application of numerical integration, trigonometric functions, online education and the modelling process. *International Journal of Research in Education and Science (IJRES)*. 2016;2(1):179-189.
 15. World Health Organization. Global solar UV index: a practical guide. A joint recommendation of the World Health Organization, World Meteorological Organization, United Nations Environmental Programme, and the International Commission on Non-Ionizing Radiation Protection. Geneva: World Health Organization; 2002:28.
 16. Kinney JP, Long CS, Geller AC. The Ultraviolet Index: A Useful Tool. *Dermatology Online Journal*. 2000;6(1):2-9.
 17. Keqin J. Workers' UV Exposure and the subsequent impact on Skin. Doctoral dissertation, Queensland University of Technology, Australia; 2010. Available: <https://eprints.qut.edu.au/38658/>.
 18. Adeniji AO, Okoh OO, Okoh AI. Distribution pattern and health risk assessment of polycyclic aromatic hydrocarbons in the water and sediment of Algoa Bay, South Africa. *Environmental Geochemistry and Health*. 2019;41(12): 65–75.
 19. Vecchia P, Hietanen M, Stuck BE, Van Deventer E, Niu S. Protecting workers from ultraviolet radiation, Vol. 14. International Commission on Non-Ionizing Radiation Protection, Oberschleißheim Germany; 2007.
 20. Parisi AV, Meldrum LR, Kimlin MG, Wong JCF, Aitken J, Mainstone JS. Evaluation of differences in ultraviolet exposure during weekend and weekday activities. *Physics in Medicine & Biology*. 2000;45(8):2253–2262.
 21. Kimlin MG, Martinez N, Green AC, Whiteman DC. Anatomical distribution of solar ultraviolet exposures among cyclists. *Photochemistry and Photobiology*. 2006; 85(2):23-27.
 22. Weber M, Graber F, Schulmeister K, Brusch H, Hann H, Kindl P, Knuschke P. Solar UVR exposure of outdoor workers (tinsmiths) in Austria. 2006. Access 21 February 2021. Available: <https://niwa.co.nz/sites/niwa.co.nz/files/import/attachments/Weber.pdf>.
 23. Cockell CS, Scherer K, Horneck G, Rettberg P, Facius R, Gugg-Helminger A, Driscoll C, Lee P. Exposure of arctic field scientists to ultraviolet radiation evaluated using personal dosimeters. *Photochemistry and Photobiology*. 2001; 74(4):570-578.

© 2022 Yusuf et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:
 The peer review history for this paper can be accessed here:
<https://www.sdiarticle5.com/review-history/91978>